
Site Amenities

BY SUPERIOR RECREATIONAL PRODUCTS



Model # B6WBINNV4-4S

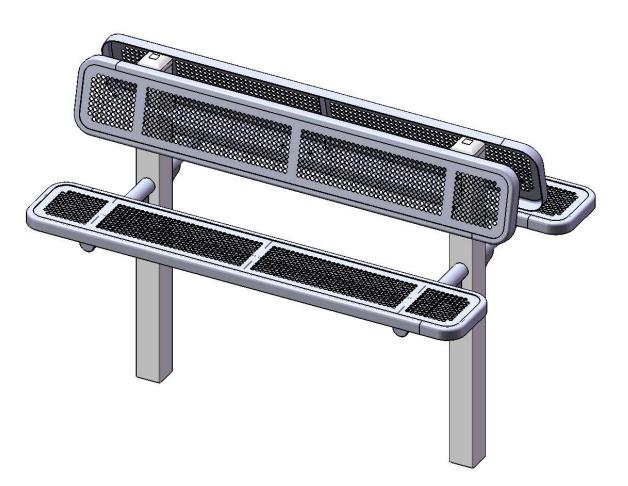

A PLAYCORE Company

3/11/2019 Page 1 of 8

HARDWARE



5/16" x 1" Machine Bolt



5/16" Washer



5/16" Kep Nut



3/11/2019 Page 2 of 8

PRODUCT SPECIFICATIONS

B6WBINNV4-4S DOUBLE SIDED INGROUND MOUNT BENCH WITH BACK

Seats & Back: 11 gauge die formed angle frame 1"x1-7/8" with 3" radius corners. 12 ga. sheet steel is punched with 5/8" diameter holes to create the perforated pattern. 7 gauge x 1-1/2" flat bar center support and mounting bracket understructure. Electrically MIG welded.

Coating: Oven fused functionalized polyethylene copolymer-based thermoplastic. Fluidized bed coating application with superior mechanical performance, impact resistance and UV-stability.

Frame: The main post is fabricated from $4 \times 4 \times 11$ gauge square tubing. 2-3/8" O.D. x 12 gauge pre-galvanized structural steel tubing seat support. Seat arms are supported by a 1/4" thick, 6" gusset. Tube ends are pre-galvanized steel capped. Seat and back mounting points are 7 gauge x 1-1/2" die stamped steel flat bar. All electrically MIG welded.

Frame Coating: Electrostatic powder coated application oven cured.


Hardware: All stainless steel hardware fasteners.

Dimensions: 6' bench inground mount with back. Seats and backs are 12" wide x 72" long. Seat height is 18". Seat back height is 35-1/4". Total depth of seat with back is 46".




Page 3 of 8

3/11/2019

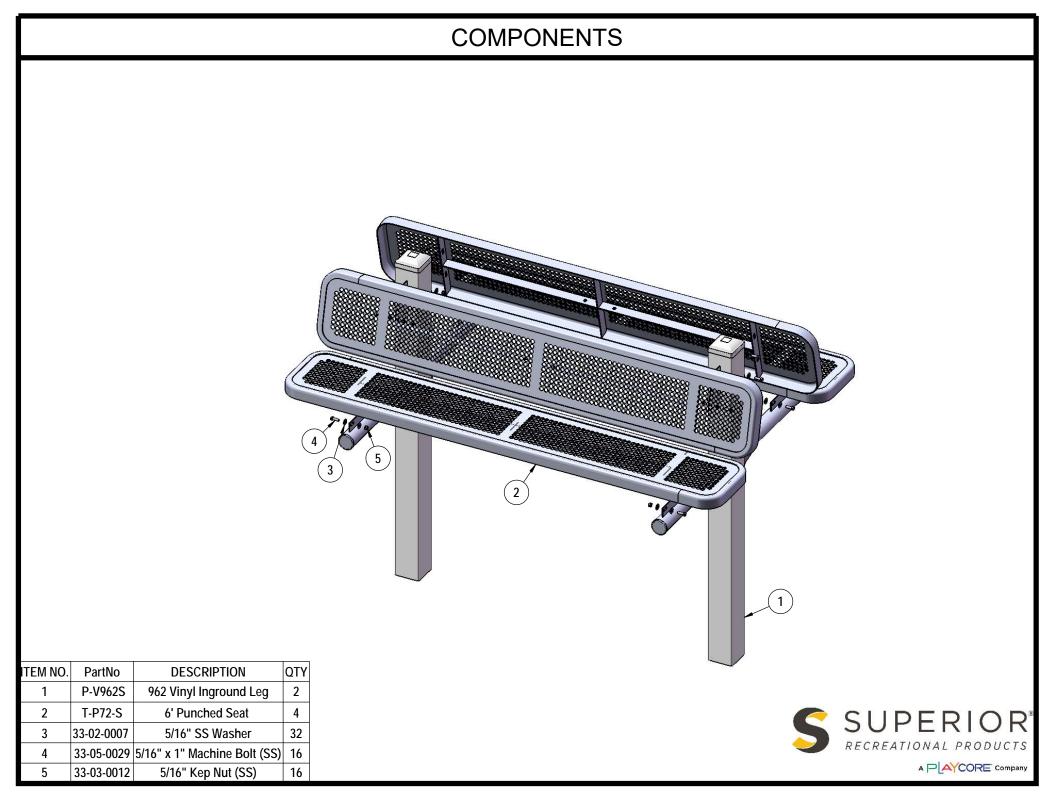

3/11/2019 Page 4 of 8

STEP 1

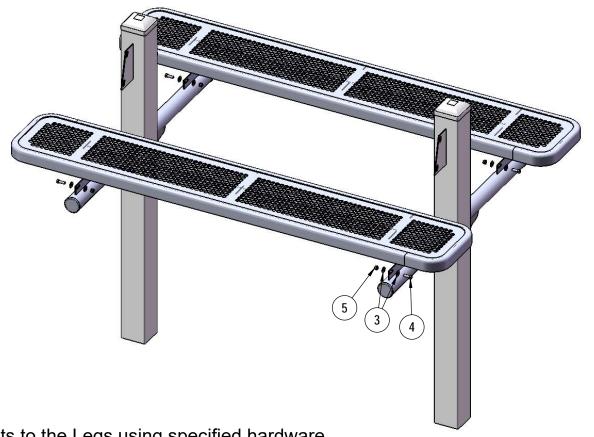


Attach the 6' Seats to the Legs using specified hardware.



A PLAYCORE Company

3/11/2019 Page 5 of 8

STEP 2

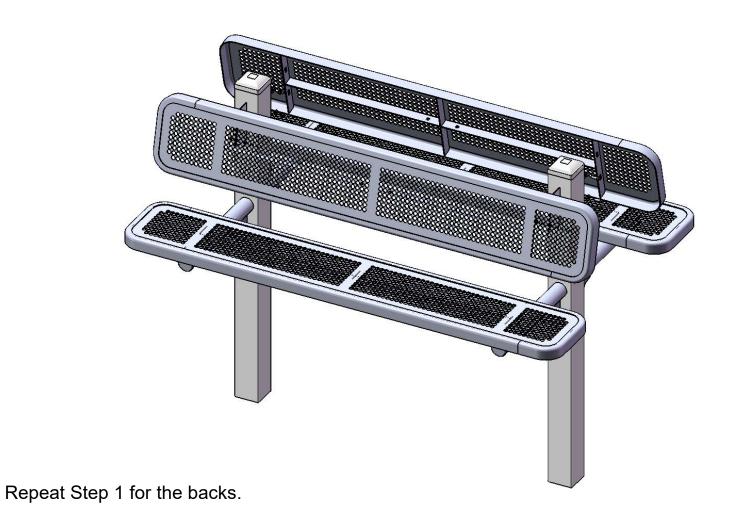





A PLAYCORE Company

3/11/2019 Page 6 of 8

FOOTINGS

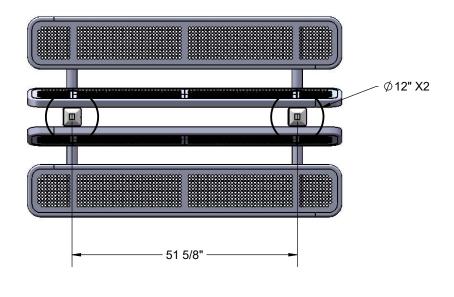


Estimated Required Concrete: 9 - 50lb Bags of Concrete Mix

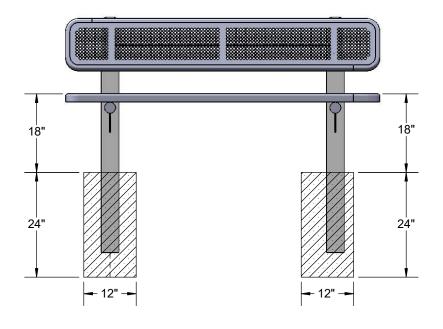



A PLAYCORE Company

3/11/2019 Page 7 of 8

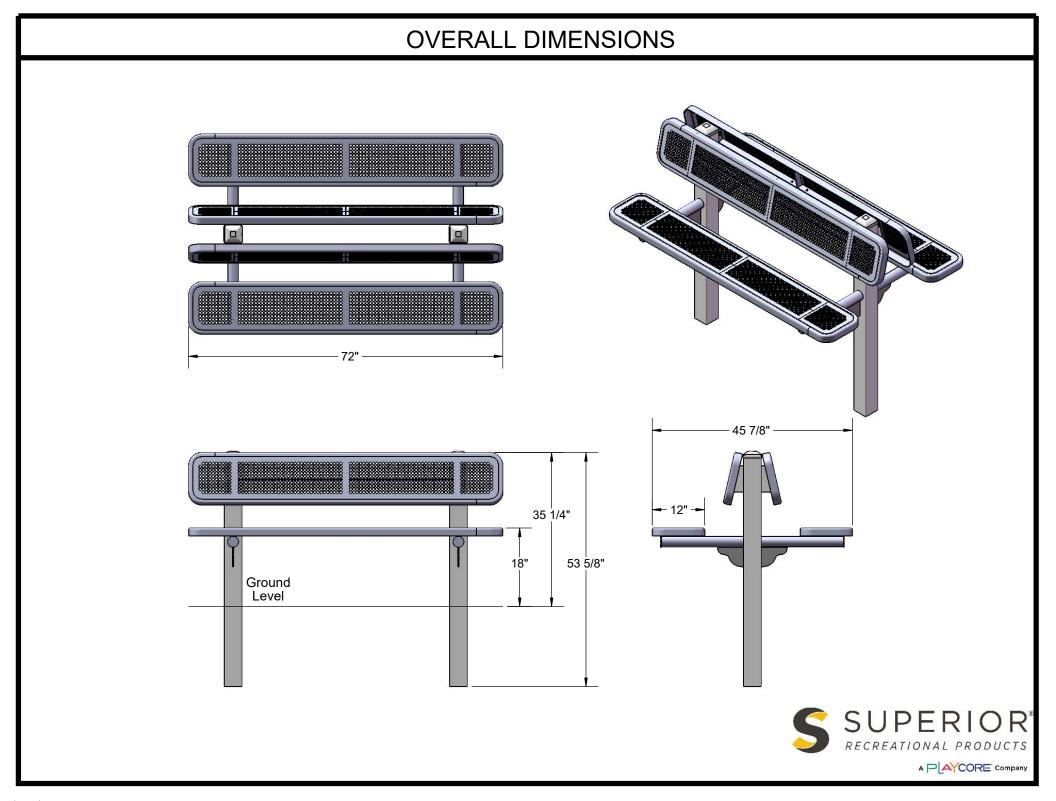

3/11/2019 Page 8 of 8