

3/20/2019 Page 1 of 6

HARDWARE



5/16" x 1" Machine Bolt



5/16" Washer





PRODUCT SPECIFICATIONS

B6WBPERFS INGROUND BENCH WITH BACK

Seats & Back: Seats shall have a 1 1/2" radius edge, fabricated from a 14ga plate. Holes are precision punched at 5/8" diameter. 7 gauge x 1-1/2" flat bar center support and mounting bracket understructure. Electrically MIG welded.

Coating: Oven fused functionalized polyethylene copolymer-based thermoplastic. Fluidized bed coating application with superior mechanical performance, impact resistance and UV-stability.

Frame: 2-3/8" O.D. x 12 gauge pre-galvanized structural steel tubing. Seat/back support is bent over a mandrel through the bend radius producing a wrinkle free bend. Tube ends are pre-galvanized steel capped. Seat mounting points are 7 gauge x 1-1/2" die stamped steel flat bar. All electrically MIG welded.

Frame Coating: Electrostatic powder coated application oven cured.

Hardware: All stainless steel hardware fasteners.


Dimensions: 6' bench inground with back. Seats and back 12" wide x 72" long. Seat height is 18", seat back height is 34-3/4". Total depth of seat with back is 22-1/4".



3/20/2019 Page 3 of 6

COMPONENTS


Attach the Seats to the Legs as shown using specified hardware.

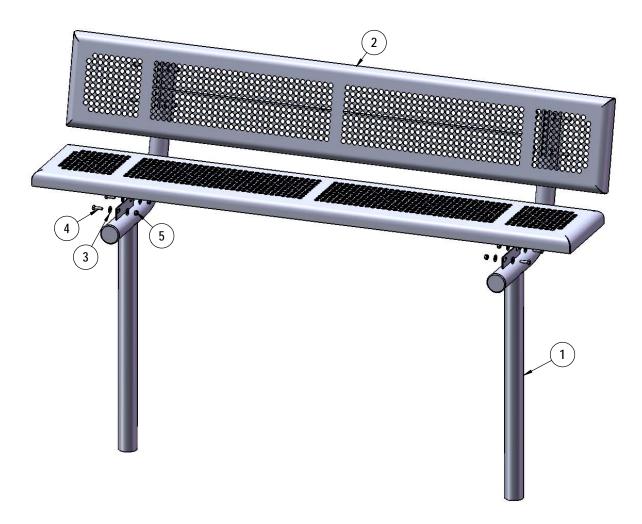


ITEM NO.	PartNo	DESCRIPTION	QTY
1	P-V940S	940 In Ground Leg	2
2	T-PR72-S	6' Punched Rolled Seat	2
3	33-02-0007	5/16" SS Washer	16
4	33-05-0029	5/16" x 1" Machine Bolt (SS)	8
5	33-03-0012	5/16" Kep Nut (SS)	8



3/20/2019 Page 4 of 6

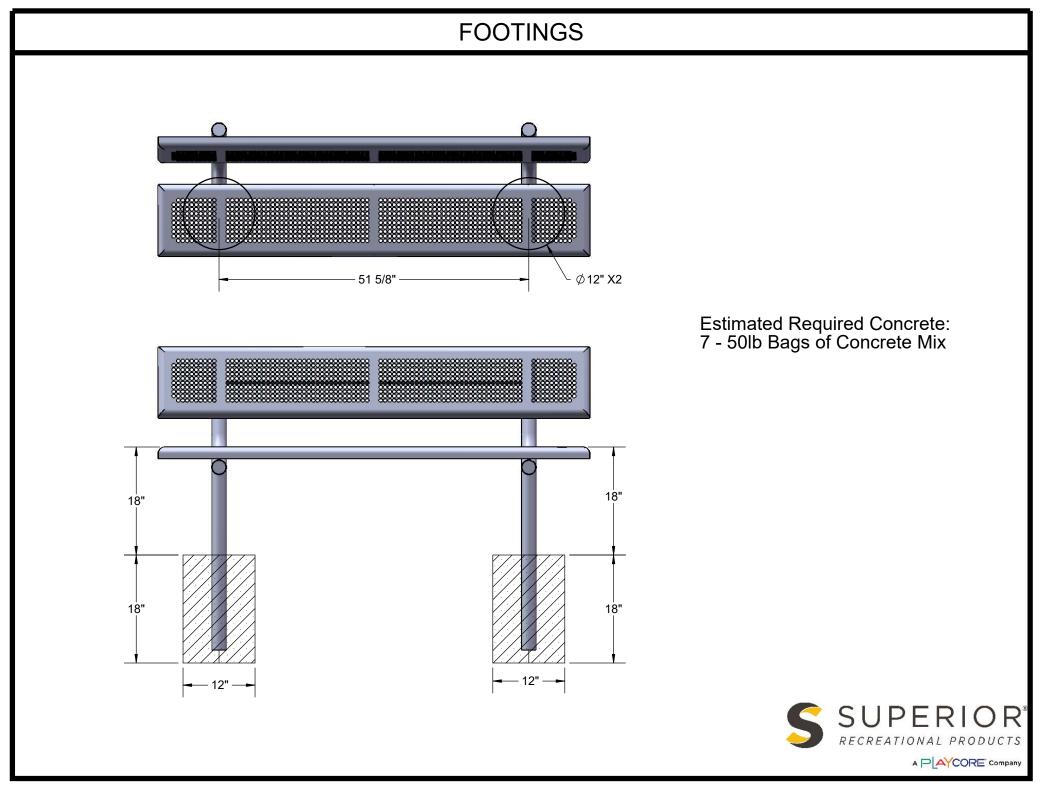

3/20/2019 Page 5 of 6

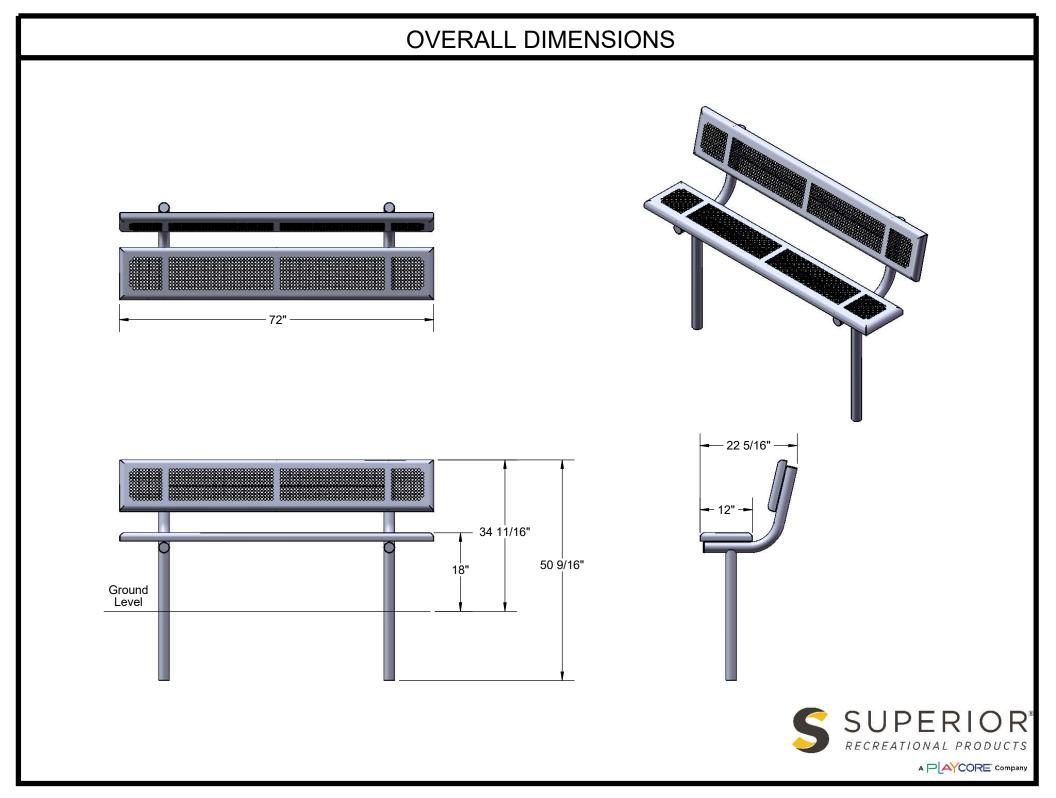

3/20/2019 Page 6 of 6