
Superior Amenities



Model # T46WEBCLASS-3SADA

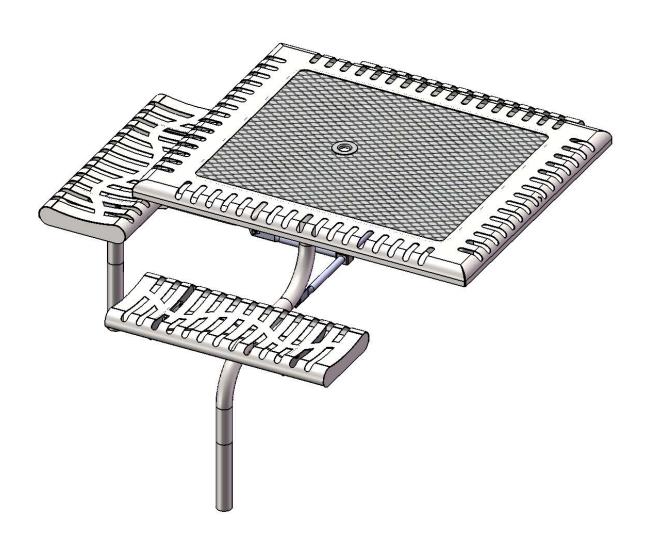

12/9/2020 Page 1 of 8

HARDWARE



5/16" x 1" Machine Bolt



5/16" Washer



5/16" Kep Nut



12/9/2020 Page 2 of 8

PRODUCT SPECIFICATIONS

T46WEBCLASS-3SADA INGROUND TABLE WITH 3 SEATS

Seat & Back: 11 gauge sheet steel is die formed with laser cut design. Seat support pieces are 11 gauge laser cut sheet steel. Top has 7 gauge x 1-1/2" flat bar center support and mounting bracket understructure. All electrically MIG welded.

Coating: Oven fused functionalized polyethylene copolymer-based thermoplastic. Fluidized bed coating application with superior mechanical performance, impact resistance and UV-stability.

Frame: 2-3/8" O.D. x 13 gauge pre-galvanized structural steel tubing. Brace attachment points are 1-1/2"x2"x3/16" steel flat bar. Cross braces 1" O.D. x 16 gauge pre-galvanized structural steel tubing. Top is attached with 7 gauge 2"x2" die formed angle. Seat mounting points are 7 gauge x 1-1/2" die stamped steel flat bar. Legs are bent over a mandrel through the bend radius producing a wrinkle free bend. All electrically MIG welded.

Frame Coating: Electrostatic powder coated application oven cured.


Hardware: All stainless steel hardware fasteners.

Dimensions: Top is 46" x 55" x 29-1/2" high. Seats are 14-5/16" wide x 36" long x 18" high. Outisde to outside dimensions are 82" x 65" x 29-1/2" high.



12/9/2020 Page 3 of 8

COMPONENTS

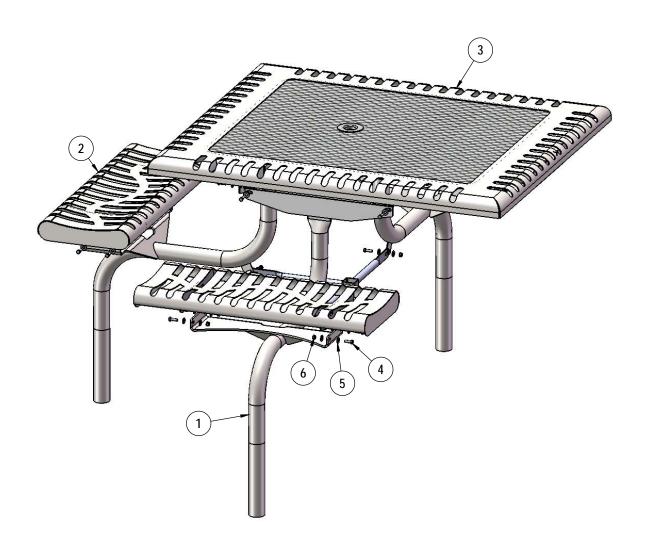


| ITEM NO. | PartNo | DESCRIPTION | QTY |
|----------|--------------|----------------------------------|-----|
| 1 | P-V369S | V369S Leg | 3 |
| 2 | CLASS36-S | Classic 36" Seat | 3 |
| 3 | CLASS46H-T | Classic Handicap Top 46" x 55" | 1 |
| 4 | 33-05-0029 | 5/16" x 1" Machine Bolt (SS) | 21 |
| 5 | 33-02-0007 | 5/16" SS Washer | 42 |
| 6 | 33-03-0012 | 5/16" Kep Nut (SS) | 21 |
| 7 | P-01-04-0344 | 358H Crossbrace w/ Umbrella Tube | 1 |



12/9/2020 Page 4 of 8

STEP 1

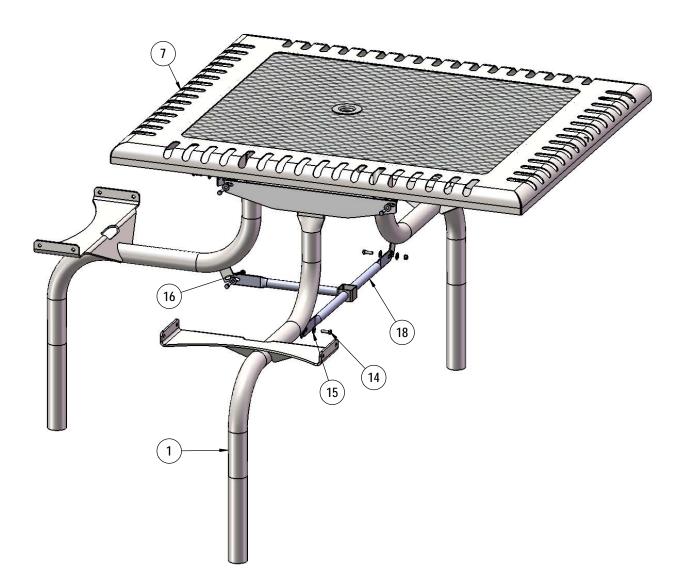


Attach the legs to the top as shown using specified hardware. Then attach the cross brace to the legs.



12/9/2020 Page 5 of 8

STEP 2

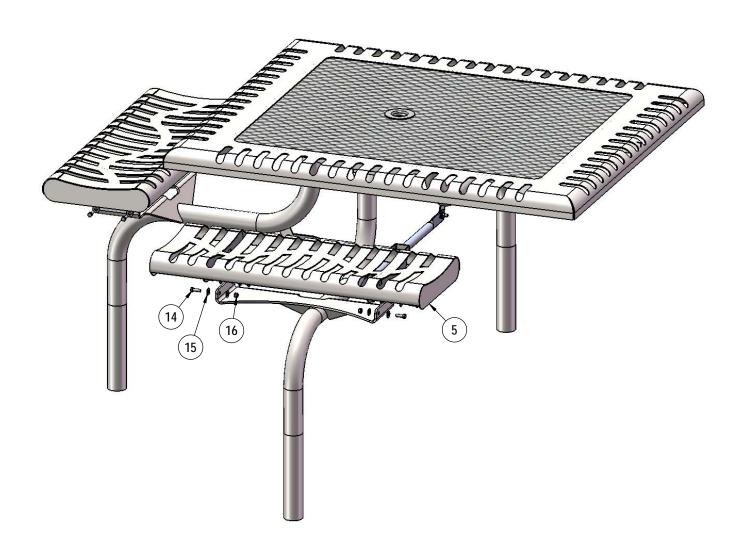


Attach the seats to the legs as shown using specified hardware.




12/9/2020 Page 6 of 8

FOOTINGS

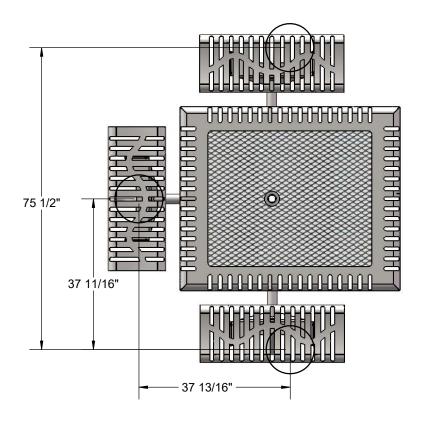


Estimated Required Concrete: 10 - 50 lb Bags of Concrete Mix

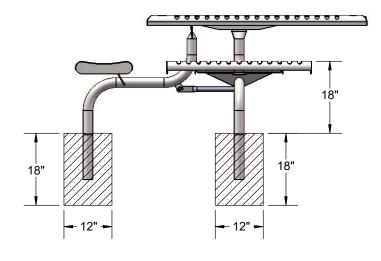



12/9/2020 Page 7 of 8

OVERALL DIMENSIONS

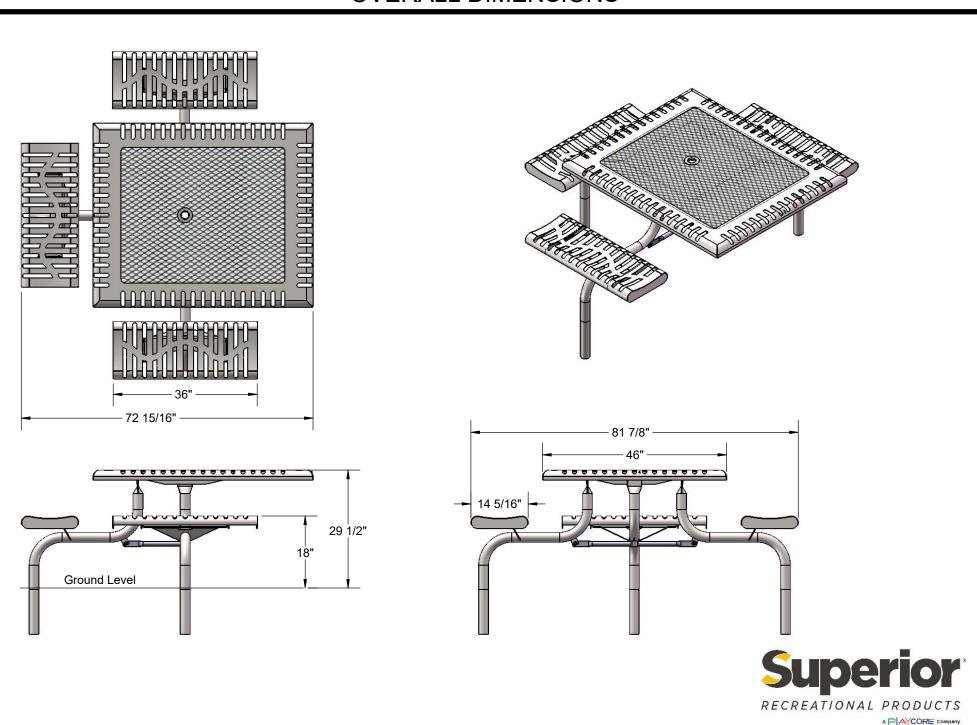

12/9/2020 Page 8 of 8