Superior Amenities -



Model # T46WEBOCT-3S



1/24/2020 Page 1 of 8

HARDWARE



5/16" x 1" Machine Bolt



5/16" Washer



5/16" Kep Nut



1/24/2020 Page 2 of 8

PRODUCT SPECIFICATIONS

T46WEBOCT-3S INGROUND TABLE WITH 3 SEATS

Top & Seats: 2" x 2" x 1/8" angle frame. 3/4" #9 steel expanded metal. 7 gauge x 1-1/2" flat bar center support and mounting bracket understructure. Top is additionally supported to the corners with 7 gauge x 1-1/2" flat bar. Electrically MIG welded.

Coating: Oven fused functionalized polyethylene copolymer-based thermoplastic. Fluidized bed coating application with superior mechanical performance, impact resistance and UV-stability.

Frame: 2-3/8" O.D. x 13 gauge pre-galvanized structural steel tubing. Brace attachment points are 1-1/2"x2"x3/16" steel flat bar. Cross braces 1" O.D. x 16 gauge pre-galvanized structural steel tubing. Top is attached with 7 gauge 2"x2" die formed angle. Seat mounting points are 7 gauge x 1-1/2" die stamped steel flat bar. Legs are bent over a mandrel through the bend radius producing a wrinkle free bend. All electrically MIG welded.

Frame Coating: Electrostatic powder coated application oven cured.


Hardware: All stainless steel hardware fasteners.

Dimensions: Top is 46" square 30-3/16" high. Seats are 10" wide x 36" long x 18" high. Outisde to outside dimensions are 77-1/2" x 61-3/4" x 30-3/16" high.



1/24/2020 Page 3 of 8

COMPONENTS

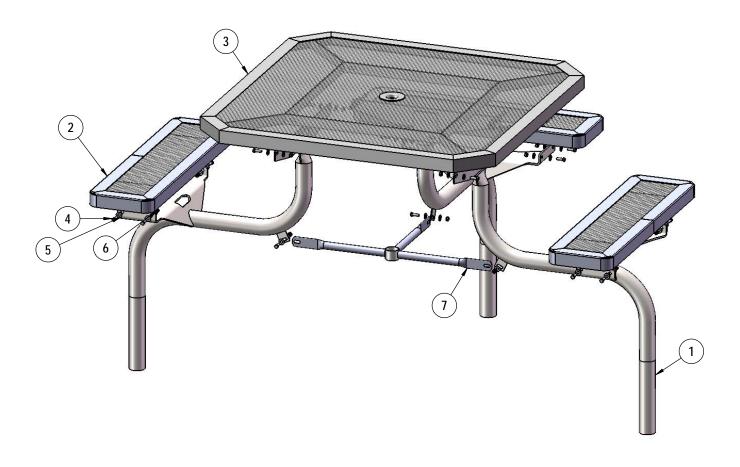


ITEM NO.	PartNo	DESCRIPTION	QTY
1	P-V369S	V369S Leg	3
2	RC36-S	3' long x 10" wide regal expanded seat	3
3	T-ORC46-T	46" Octagon Regal Expanded Top	1
4	33-05-0029	5/16" x 1" Machine Bolt (SS)	21
5	33-02-0007	5/16" SS Washer	42
6	33-03-0012	5/16" Kep Nut (SS)	21
7	P-01-04-0344	358H Crossbrace w/ Umbrella Tube	1



1/24/2020 Page 4 of 8

STEP 1

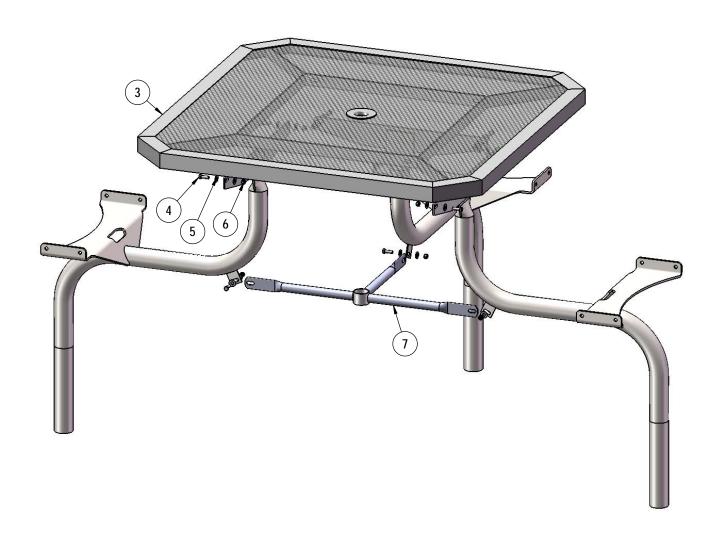

Attach the legs to the top as shown using specified hardware. Then attach the cross brace to the legs.



1/24/2020 Page 5 of 8

STEP 2




Attach the seats to the legs as shown using specified hardware.



1/24/2020 Page 6 of 8


FOOTINGS - 75 1/2" -- 37 11/16" 37 13/16" Ø12" Estimated Required Concrete: 10 - 50 lb Bags of Concrete Mix

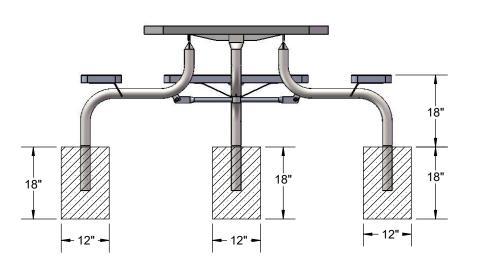






1/24/2020 Page 7 of 8

OVERALL DIMENSIONS

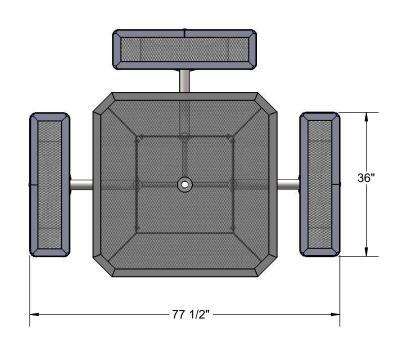

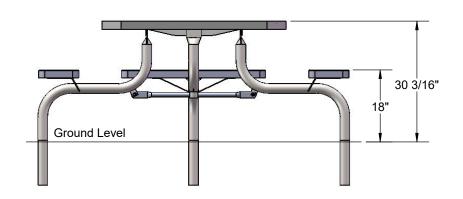

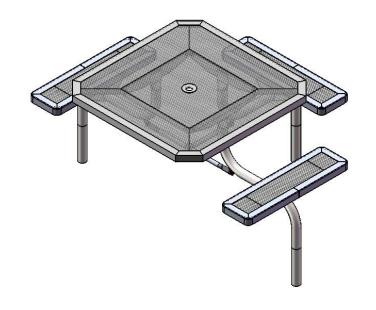





1/24/2020 Page 8 of 8