



HARDWARE





5/16" Washer



5/16" Washer



10/5/2020

PRODUCT SPECIFICATIONS

T8RCDBLPEDHDCPS RECTANGULAR INGROUND TABLE

Seat & Back: 2" x 2" x 1/8" formed angle frame with 1-1/2" radius corners. 3/4" #9 steel expanded metal. 7 gauge x 1-1/2" flat bar center support and mounting bracket understructure. Electrically MIG welded.

Coating: Oven fused functionalized polyethylene copolymer-based thermoplastic. Fluidized bed coating application with superior mechanical performance, impact resistance and UV-stability.


Frame: 4 x 4 x 11 gauge structural steel square tubing. Tubing is capped with a 4 x 4 x 3/16" steel flat bar. Arms are supported with 6" x 6" x 1/4" steel flat bar gussets. Seat and top mounting points 7 gauge x 1-1/2" die stamped steel flat bar. All electrically MIG welded.


Frame Coating: Electrostatic powder coated application oven cured.

Hardware: All stainless steel hardware fasteners.

Dimensions: Top is 30" wide x 96" long x 30" high. Seats are 10" wide x 72" long x 18-1/8" high. Outisde to outside dimensions are 67" x 96".




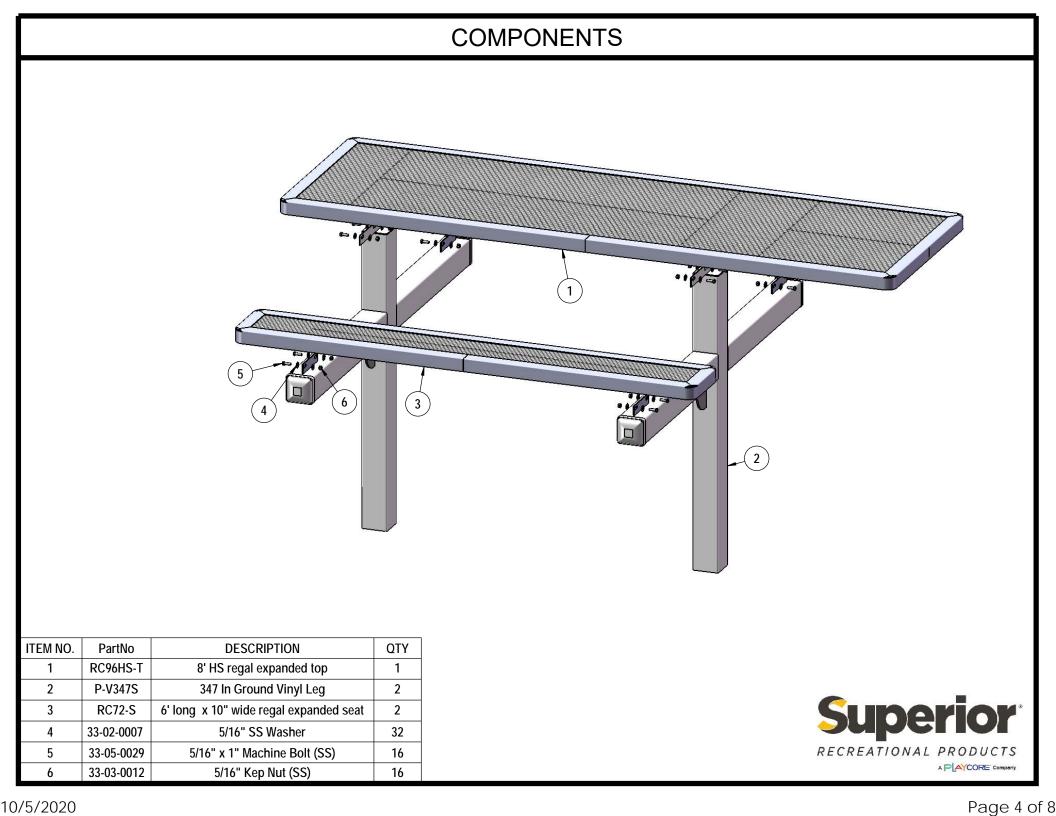

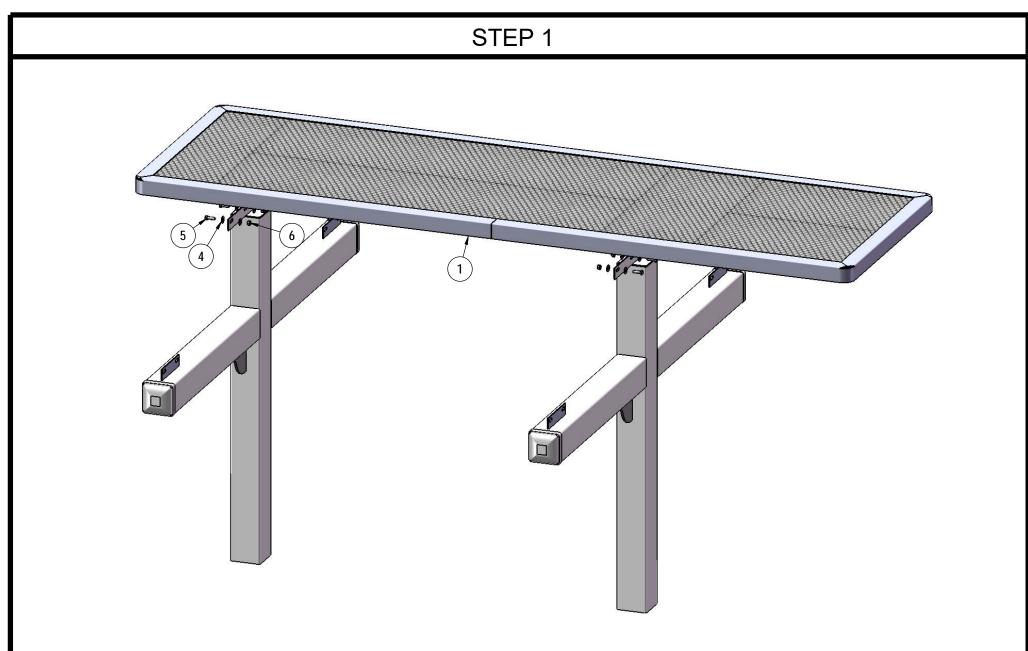

Attach the top to the post assemblies as shown using specified hardware.




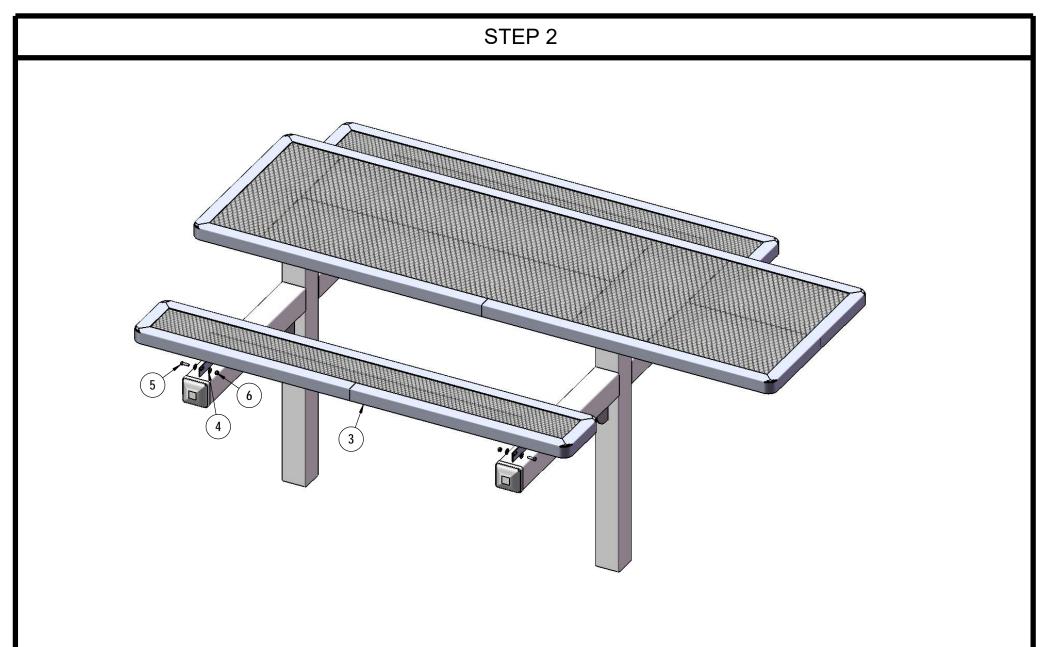

Repeat step 1 for the seats.



FOOTING

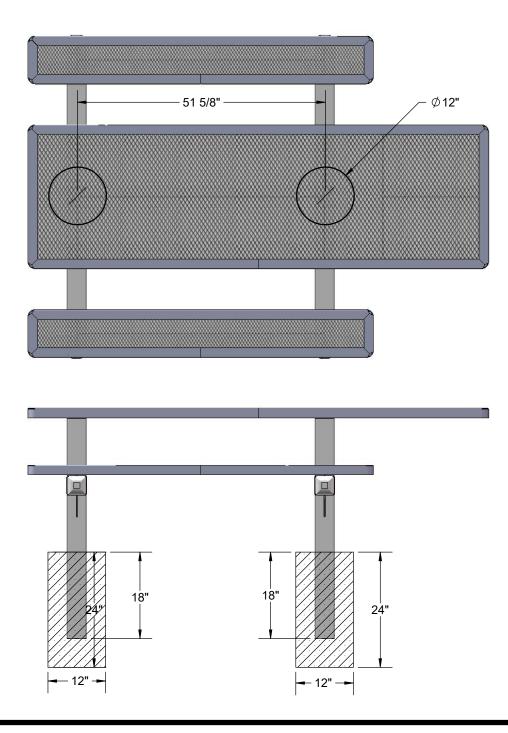

Estimated Required Concrete: 10 - 50 lb Bags of Concrete Mix



10/5/2020

OVERALL DIMENSIONS

